

## 功率互感器

Power transformer


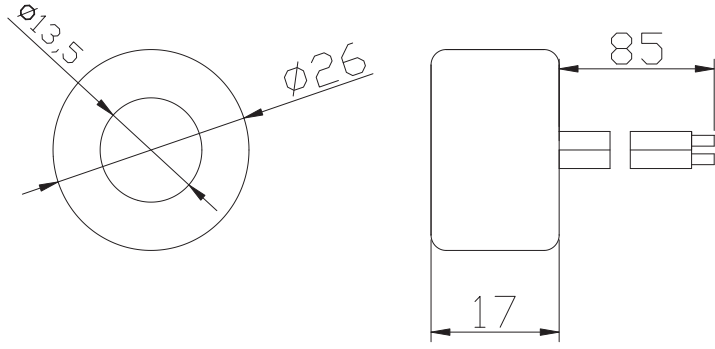
### ► 产品特征:

- 采用高导磁率磁芯，精度高，线性度好；
- 输入一次小电流时，互感器输出功率大，电能表能快速启动工作；
- 一次引出灵活多样，体积小，安装方便；
- 使用广泛，主要用于电能表掉线防窃电。

### ► Features:

- Adopted high permeability core , high accuracy, good linear performance;
- Small primary current make output current, which drive meter start to work normally quickly;
- The transformer will be saturated quickly when input large primary current, which guarantee the others components in meter avoid any destroy.
- The primary cable can be displayed in many ways, small size, easy installation.


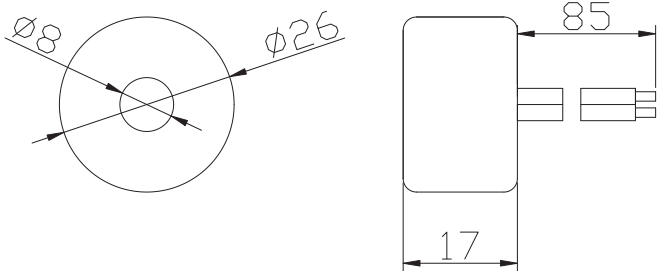
## 产品及外形尺寸图 Outline dimensions

G-01	外形尺寸图 Outline dimension
	

## 常用规格及参数 Regular Specs and Parameters

Type 型号	一次电流 Input Current (A)	输出电压 Output voltage (V)	额定负载(Ω) Rated load(Ω)
G-01	2(60)A/1T	2.5(10)V	1KΩ
	1(60)A/2T	2.5(10)V	1KΩ


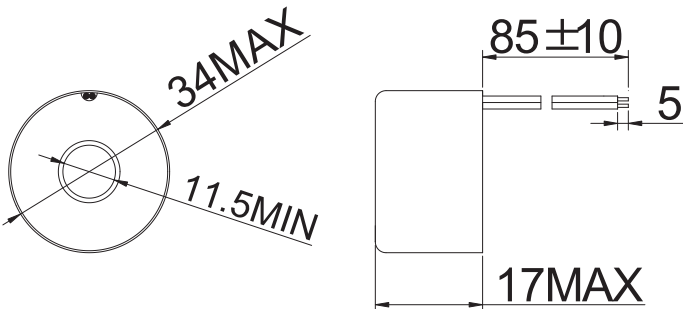
**产品及外形尺寸图** Outline dimensions

G-02	外形尺寸图 Outline dimension
	

**常用规格及参数** Regular Specs and Parameters

Type 型号	一次电流 Input Current (A)	输出电压 Output voltage (V)	额定负载( $\Omega$ ) Rated load( $\Omega$ )
G-02	2(60)A/1T	3.6(15)V	1K $\Omega$
	1(60)A/2T	3.6(15)V	1K $\Omega$


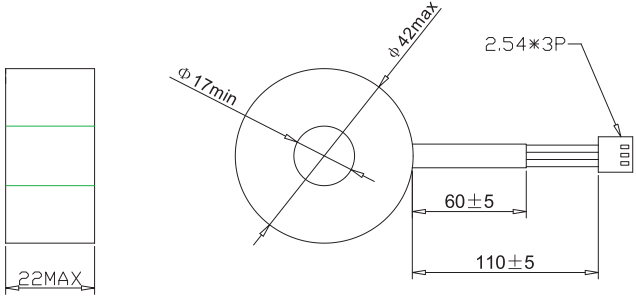
**产品及外形尺寸图** Outline dimensions

G-03	外形尺寸图 Outline dimension
	

**常用规格及参数** Regular Specs and Parameters

Type 型号	一次电流 Input Current (A)	输出电压 Output voltage (V)	额定负载( $\Omega$ ) Rated load( $\Omega$ )
G-03	2(60)A/1T	3.8(15)V	1K $\Omega$
	1(60)A/2T	3.8(15)V	1K $\Omega$


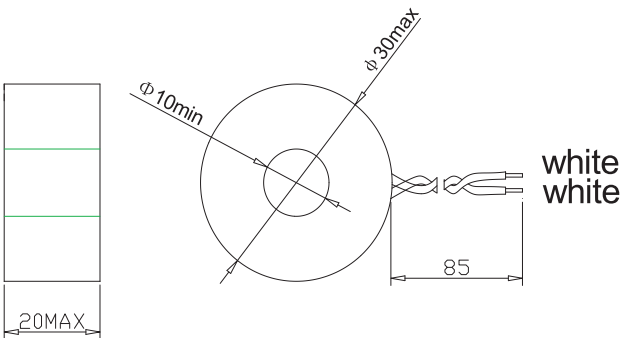
## 产品及外形尺寸图 Outline dimensions

G-04	外形尺寸图 Outline dimension
	

## 常用规格及参数 Regular Specs and Parameters

Type 型号	一次电流 Input Current (A)	输出电压 Output voltage (V)	额定负载(Ω) Rated load(Ω)
G-04	1(60)A/4T	6(9)V	560 Ω

## 产品及外形尺寸图 Outline dimensions

G-05	外形尺寸图 Outline dimension
	

## 常用规格及参数 Regular Specs and Parameters

Type 型号	一次电流 Input Current (A)	输出电压 Output voltage (V)	额定负载(Ω) Rated load(Ω)
G-05	1(60)A/1T	3.6(4)V	1K Ω